

中英俄西四国语言说明书/105G铜版纸/单黑双面印刷/风琴折4折再3折/225\*294mm/A2



## TK06

### MINI TACTICAL FLASHLIGHT

**800 LUMENS MAXIMUM OUTPUT**

**335 METERS MAXIMUM BEAM DISTANCE**

**(ENGLISH)FENIX TK06 FLASHLIGHT**

- 800 lumens maximum output and 335 meters maximum beam distance.
- Linumus SST20 L4 cool white LED, with a lifespan of 50,000 hours.
- Powered by a 18650 Li-ion battery or 2 CR123A batteries.
- Instant power activation with momentary tactical tail switch.
- Reverse polarity protection, to protect from improper battery insertion.
- Made of A6061-T6 aluminum.
- Premium type HAIII hard anodized anti-abrasive finish.
- 4.88" x 1.22" x 0.89" / 124 x 31 x 22.6 mm.
- 2.86 oz / 81 g (excluding battery).

**OPERATING INSTRUCTION**

**On/off**  
Tap the tail switch to momentarily turn on the light (release it will go out), fully press the tail switch to constantly turn on the light, fully press once again to turn off the light.

**Output Selection**  
With the light switched off, tap the tail switch to momentarily turn on the light, release and tap the tail switch once again in 1 second to cycle through High→Med→Low. Then fully press the tail switch to lock the needed mode and constantly turn on the light.

**BATTERY SPECIFICATIONS**

| Type                             | Dimensions | Nominal Voltage | Recommended          |
|----------------------------------|------------|-----------------|----------------------|
| Rechargeable Li-ion battery      | 18650*     | 3.6V            | Fenix ARB-L18 Series |
| Non-rechargeable Lithium battery | CR123A     | 3.0V            | /                    |

**(中文)Fenix TK06 手电**

- 最高亮度800流明，最远射程335米
- 使用1颗单自光Li-ion电池SST20 L4 LED，寿命50000小时
- 标配1节18650可充电锂离子电池，兼容2节CR123A电池
- 金属材质，—级磨砂，防止电池短路及防止电路造成危害
- 采用A6061-T6铝材制造，表面进行军标三级硬质阳极氧化抗磨处理
- 尺寸：124×31×22.6毫米
- 重量：81克（不含电池）

**操作说明**

**开关/关机**  
轻触尾部开关可以暂时点亮手电（放开即熄灭），完全按下尾部开关可持续点亮手电，再次完全按下即可关闭手电。


**档位切换**  
关机状态下，轻触尾部开关时点亮手电，放开后在1秒内再次轻触尾部开关，即可切换至中→亮→低档的顺序循环调节档位；调节到所需档位后，完全按下开关可以锁定该档位并持续点亮。

**电池安装**  
旋开筒尾盖安装标称电池，注意将电池的极性方向与灯头灯尾，按筒尾盖即可工作。

**电池选用**

| 电池类型     | 尺寸规格   | 标称电压 | 推荐使用            |
|----------|--------|------|-----------------|
| 可充电锂离子电池 | 18650* | 3.6V | Fenix ARB-L18系列 |
| 一次性锂电池   | CR123A | 3.0V | /               |

▲ 18650锂离子电池(Li-ion) 电池属于工业产品，并非有安全保障的民用商品，当电池品质不良或者使用不当（短路、高温等等）时可能发生燃烧、爆炸并危及人身和财产安全。若使用此电池种类应明白其中的风险。

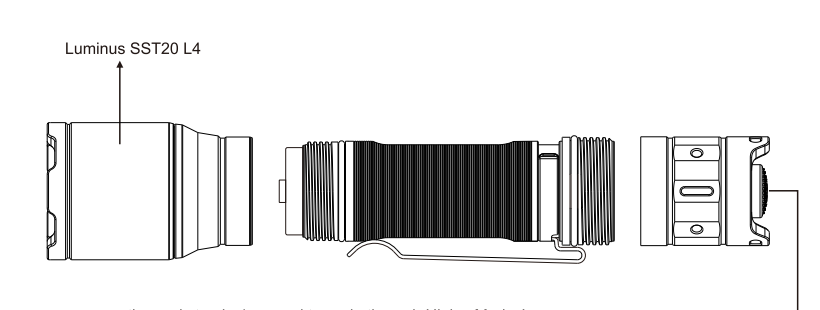


Luminus SST20 L4

continuously tap in 1 second to cycle through High→Med→Low.

Continuously click to cycle through High→Med→Low.

Tactical switch

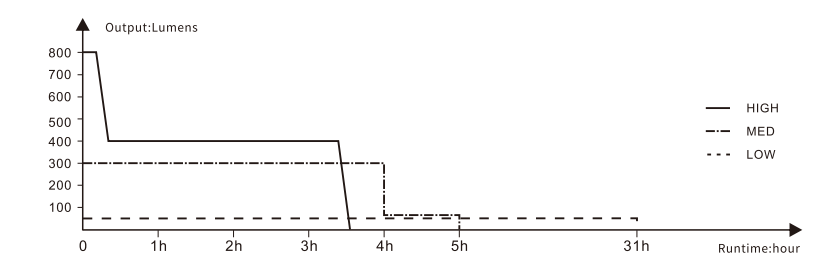

**TECHNICAL PARAMETERS**

|                   | HIGH                                         | MED                | LOW                 |
|-------------------|----------------------------------------------|--------------------|---------------------|
| ANSI/PLATO FL1    | 800 lumens                                   | 300 lumens         | 50 lumens           |
| Output            | 18650 Li-ion Battery<br>3 hours 35 minutes*  | 5 hours            | 31 hours            |
| Runtime           | CR123A Lithium Battery<br>1 hour 10 minutes* | 4 hours 50 minutes | 22 hours 30 minutes |
| Distance          | 335 meters                                   | 210 meters         | 85 meters           |
| Intensity         | 27952 candela                                | 10838 candela      | 1778 candela        |
| Impact Resistance | 1 meter                                      |                    |                     |
| Waterproof        | IP68, 2 meters underwater                    |                    |                     |

▲ Note: The above specifications are the test results given by Fenix through its laboratory testing using one Fenix ARB-L18-2600U Li-ion battery and two CR123A batteries under the temperature of 21±3°C and humidity of 45%-80%. The true performance of this product may vary according to different working environments and the actual battery used.

\*The High output is measured in total of runtime including output at reduced levels due to temperature or protection mechanism in the design.

**USAGE AND MAINTENANCE**

- Disassembling the sealed head can cause damage to the light and will void the warranty.
- Fenix recommends using an excellent quality battery.
- If the light will not be used for an extended period, remove the battery, or the light could be damaged by electrolyte leakage or battery explosion.
- Li-ion battery needs to be charged even if the battery is not exhausted, charge immediately when the battery is exhausted; it has no memory effect.
- Unscrew the tail cap half a turn or take out the battery to prevent accidental activation during storage or transportation.
- Long term use can result in O-ring wear. To maintain a proper water seal, replace the ring with an approved spare.
- Periodic cleaning of the battery contacts improves the lamp's performance as dirty contacts may cause the lamp to flicker, shine intermittently or even fail to illuminate for the following reasons:  
A: The battery needs replacing.

**BATTERY REPLACEMENT**

Unscrew the tail cap to insert the battery with the anode side (+) towards the light head, then screw the tail cap back on.

**INTELLIGENT PROTECTION**

The light will accumulate a lot of heat when used on High output level for extended periods. It will automatically downshift to 400 lumens to reduce temperature after it has been used on High for 5 minutes.

**技术参数**

|                | 高亮档                  | 中亮档      | 低亮档     |
|----------------|----------------------|----------|---------|
| ANSI/PLATO FL1 | 800流明                | 300流明    | 50流明    |
| 亮度             | 18650锂电池<br>3小时35分*  | 5小时      | 31小时    |
| 续航时间           | CR123A锂电池<br>1小时10分* | 4小时50分   | 22小时30分 |
| 射程             | 335米                 | 210米     | 85米     |
| 光强             | 27952坎德拉             | 10838坎德拉 | 1778坎德拉 |
| 防跌落高度          | 1米                   |          |         |
| 防水等级           | IP68，水深2米            |          |         |

▲ 注：以上参数为使用1节Fenix ARB-L18-2600U锂离子电池或2节CR123A电池，在温度21±3°C和湿度50%-80%的情况下，在Fenix实验室环境下测试得出。实际表现随着供电电池以及使用环境的变化而简化。

\*高亮档续航为保留温控保护测试的累计续航。

除自行承担自担的责任。使用品质优秀并带有保护电路的锂离子电池会在一定程度上降低风险。

**温控保护**

手电长时间以高亮档工作会累积大量热量，为避免外壳温度过高影响使用寿命，手电在高亮档持续点亮5分钟后会逐步降低亮度至400流明。

**使用与维护**

- 请勿将手指夹于尾部密封材料，否则将会导致导致失效并可能损坏手电。
- 请使用优质电池，并且当长期不用手电时将电池从手电中取出，否则可能因部分品质不良的电池长期或者蓄满，造成手电损坏。
- 锂离子电池电量显示在剩余20%之前即需要充电，电池电量耗尽之时请立即充电，锂离子电池没有记忆效应。
- 由于采用了一款创新的尾部开关，手电在包壳里时可能因为挤压而误触开关，如不慎造成此问题，您可以在把手装入包中时，将尾盖旋松或取下或取电池。
- 长期不使用手电，手电的O圈可能受损，如果发现了这种情况，请立即更换O圈以维持手电的防水性能。
- 请经常清洗手电的导电接触面以保证手电的正常工作，特别是当手电出现异常的闪烁或者无法点亮的时候，以下是几个可能等致手电出现异常的闪烁或者无法点亮的原因：  
原因一：电池电量不足  
解决方法：对电池进行充电，或者更换电池（换新电池时请注意正负极方向）  
原因二：螺旋纹或PCB板的导电接触面或其他接触面/接触点被弄脏了  
解决方法：用酒精棉签清洁导电接触面或接触点。  
如上述方法无效，请联系经销商并按照售后服务条款保修。

**LIGHTING FOR EXTREMES**

FACEBOOK
 WECHAT

"Follow" us for more information about Fenix.

扫描并关注，获取更多Fenix相关信息

**FENIXLIGHT LIMITED**

Tel: +86-755-26631163/8330 Fax: +86-755-29631181  
E-mail: info@fenixlight.com Web: www.fenixlight.com  
Address: 8/Floor, Spring Valley, (Wonderful Light Wisdom Valley) Meisheng Huigu Technology Industrial Park, 83 Dabao Road, Bao'an District, Shenzhen 518133, China

61.122.191.005-A2-20200422

Solution: Replace battery (Ensure battery is inserted according to the manufacturer's specifications).  
B: The threads, PCB board contact or other contacts are dirty. Solution: Clean the contact points with a cotton swab soaked in rubbing alcohol.  
If the above methods don't work, please contact your authorized distributor.

**INCLUDED**

TK06 flashlight, ARB-L18-2600U rechargeable Li-ion battery, Micro USB charging cable, lanyard, holder, Spare O-ring, Spare rubber switch boot, User manual, Warranty card.

**WARNING**

This flashlight

[illegible]